

8134-HC-6P3

✓ ACTIVE

HOLTITE

TE Internal #: 6-1437514-9

3.45 mm [.136 in] Socket Length, 1.47 mm [.058 in] PCB Hole, Open Bottom, Cable-to-Board, Signal, -65 – 125 °C [-85 – 257 °F], Pin Sockets

[View on TE.com >](#)



Connectors > Socket Connectors > Pin Sockets



Socket Length: 3.45 mm [.136 in]
PCB Hole Diameter: 1.47 mm [.058 in]
Socket Sleeve Style: Open Bottom
Mating Pin Diameter Range: .51 – .76 mm [.02 – .03 in]
Connector System: Cable-to-Board

Features

Product Type Features

Connector & Contact Terminates To	Printed Circuit Board
Socket Sleeve Style	Open Bottom
Connector System	Cable-to-Board
Sealable	No

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
-----------------------------------	---------------

Body Features

Sleeve Plating Material	Tin
Sleeve Material	Copper

Contact Features

Contact Spring Plating Material	Tin
Contact Mating Area Plating Material	Tin-Lead
Contact Base Material	Beryllium Copper
Contact Current Rating (Max)	5 A



Termination Features

Termination Method to PCB	Through Hole - Press-Fit
Insertion Method	Hand/Semi-Automatic
Termination Method to Wire & Cable	Solder

Dimensions

PCB Thickness (Recommended)	.79 – 3.18 mm[.03 – .05 in]
Socket Length	3.45 mm[.136 in]
PCB Hole Diameter	1.47 mm[.058 in]
Mating Pin Diameter Range	.51 – .76 mm[.02 – .03 in]

Usage Conditions

Operating Temperature Range	-65 – 125 °C[-85 – 257 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Signal
---------------------	--------

Packaging Features

Packaging Method	Loose Piece
Packaging Quantity	2000

Other

Spring Material	Beryllium Copper
-----------------	------------------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Pb (13% in 4690971273) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free



Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 5-1437514-7
399-HT-114=AUTOMATIC SEATING T



TE Part # 5-1437514-5
399-HT-113="SEATING TOOL TIP,P

Customers Also Bought



TE Part #5052942064
RNF-100-3/32-0-STK




TE Part #1-102155-0
050 UNIV HDR SP 4S 15DP STD



TE Part #207526-8
SKT HDR ASSY,9 POSN,METRIMATE



TE Part #1-320551-1
PIDG R 22-16 COMM 22-18 MIL 8

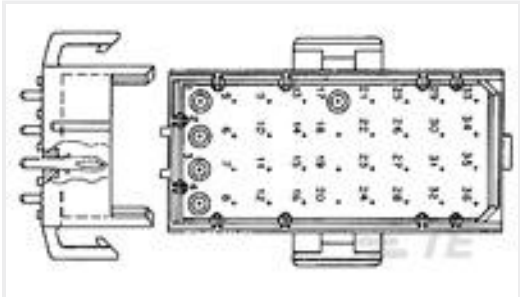

TE Part #640498-3
03P MR HDR ASSY V0 RED



TE Part #1478762-9
METAL BACKSHELL 9 WAY TOP E



TE Part #2201778-1
MICRO SD PUSH PUSH LOW PROFILE TYPE



TE Part #5205737-7
25 PLUG SP/MS STD TYPE

8134-HC-6P3

3.45 mm [.136 in] Socket Length, 1.47 mm [.058 in] PCB Hole, Open Bottom, Cable-to-Board, Signal, -65 – 125 °C [-85 – 257 °F], Pin Sockets



Documents

Product Drawings

8134-HC-6P3=HOLTITE 3.3.20

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_6-1437514-9_C.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_6-1437514-9_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_6-1437514-9_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English