




Part Number : [14600101](#)
Product Description : 2.54mm Pitch SL
Insulation Displacement Connector Assembly,
Female, Single Row, Version A, Non-polarized,
Wire Size 24 AWG, 3.81µm Tin/Lead (SnPb), 10
Circuits
Series Number : 70400
Status : Active
Product Category : Connector Housings
Engineering Number : 70400-0009

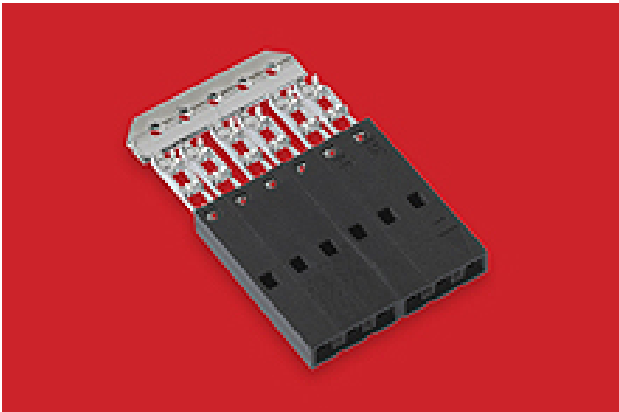

Documents & Resources

Drawings
[014600101_sd.pdf](#)
[PK-70873-0001-001.pdf](#)

3D Models and Design Files
[014600101_stp.zip](#)

Product Environment Compliance

Compliance

China RoHS	Not Reviewed
EU ELV	Not Reviewed
Low-Halogen Status	Not Reviewed
REACH SVHC	Not Reviewed
EU RoHS	Not Reviewed

Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474

Part Details

General

Status	Active
Category	Connector Housings
Series	70400
Description	2.54mm Pitch SL Insulation Displacement Connector Assembly, Female, Single Row, Version A, Non-polarized, Wire Size 24 AWG, 3.81µm Tin/Lead (SnPb), 10 Circuits
Comments	Terminals Preloaded
Component Type	Housing
Product Family	SL Modular Connectors
Product Name	SL
UPC	800753765665

Agency

CSA	LR19980
UL	E29179

Electrical

Voltage - Maximum	250V
-------------------	------

Physical

Circuits (Loaded)	10
Color - Resin	Black
Durability (mating cycles max)	25
Entry Angle	Vertical
Flammability	94V-0
Gender	Female
Glow-Wire Capable	No
Lock to Mating Part	None
Material - Metal	Phosphor Bronze

Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Polyester Alloy
Number of Rows	1
Packaging Type	Tube
PCB Retention	None
Pitch - Mating Interface	2.54mm
Plating min - Mating	3.810µm
Plating min - Termination	1.905µm
Polarized to Mating Part	No
Stackable	Yes
Temperature Range - Operating	-40° to +105°C
Termination Interface Style	IDT or Pierce
Wire/Cable Type	Discrete Wire, Ribbon Cable
Wire Insulation Diameter	1.35mm max.
Wire Size (AWG)	24

Mates With / Use With

Mates with Part(s)

Description	Part Number
KK 254 Vertical Breakaway Headers with Friction Lock	<u>42375</u>
KK 254 Right-Angle Surface Mount Compatible Breakaway Headers	<u>42377</u>

Application Tooling

Global

Description	Part Number
Ribbon Cable Tool Kit, Press Not Included	<u>622016600</u>